

LAARS[®] FT SERIES

**Wall Hung Boiler or
Combination Boiler
& Water Heater**

Ultra-high 95% efficiency



**HIGH EFFICIENCY &
ENVIRONMENTALLY FRIENDLY**

LAARS[®] 
Heating Systems Company

Built to be the Best[®]

COMFORT • RELIABILITY • PEACE OF MIND



Since our beginning as Laars Engineering in 1948, Laars has embodied innovation and advancement in heating technology. We have built upon our technology over the past seventy plus years to ensure Laars products meet the demands of today's discerning customer.

Laars stands behind each of its products with stringent quality standards, such as requiring each unit to be live-fired before it's packaged, and a service and support team that places the customer and their needs first – every time.

Laars products are widely used in space heating, radiant floor heating, domestic water heating, baseboard, and cast iron radiators. Laars' years of experience, world class engineering, and customer support combine to make us your go-to experts in home heating. Laars brings comfort, reliability, and peace of mind to you and your home.

HEAT AND HOT WATER FOR EVERYONE

The Laars FT Series uses the latest in fire tube heat exchanger technology with a corrosion-resistant stainless steel design, resulting in quick heating response, ultra high efficiency, & years of reliable service.

This design greatly reduces heating bills when compared to older, low-efficient boilers – up to 20% lower! Potentially saves thousands of dollars in heating bills over the life of the boiler.

SAVE MONEY

**FIND REBATES
& TAX CREDITS
AT LAARS.COM**



ON DEMAND DOMESTIC HOT WATER



Domestic Hot Water Mini-Tank

By combining both storage and recovery capacity, the FT Series Combi boiler's unique, integrated domestic hot water mini-indirect tank delivers stable hot water on demand.

- Contains up to one gallon of stored hot water on standby at all times
- Provides immediate response, greatly reducing "time-to-faucet" and substantially reducing "cold water sandwich", resulting in an uninterrupted flow of hot water
- FT Series mini-indirect tank technology:
 - Domestic hot water stored in a coiled, stainless tube
 - Boiler water surrounds the domestic hot water coil keeping it hot at all times
 - Tank is surrounded in a heavily-insulated wrap to minimize heat loss

LAARS FT SERIES PROVEN INNOVATION



Modulates with up to 10:1 turndown to reduce energy use



Durable, Stainless Steel Fire Tube Heat Exchanger offers long life and superior heating performance



Environmentally friendly, ultra high 95% AFUE efficiency



Long life, high performance blower offers reliable, quiet operation



Integrated, fast acting domestic hot water tank delivers hot water fast, when you need it




Left side access panel to help get to hard to reach components



Laars Advanced Control System

- Quick set-up control functions
- Outdoor Reset, to maximize efficiency
- Conformal coating encapsulates control board protecting it from moisture
- Anti-freezing control
- Cascade up to 20 heating only units

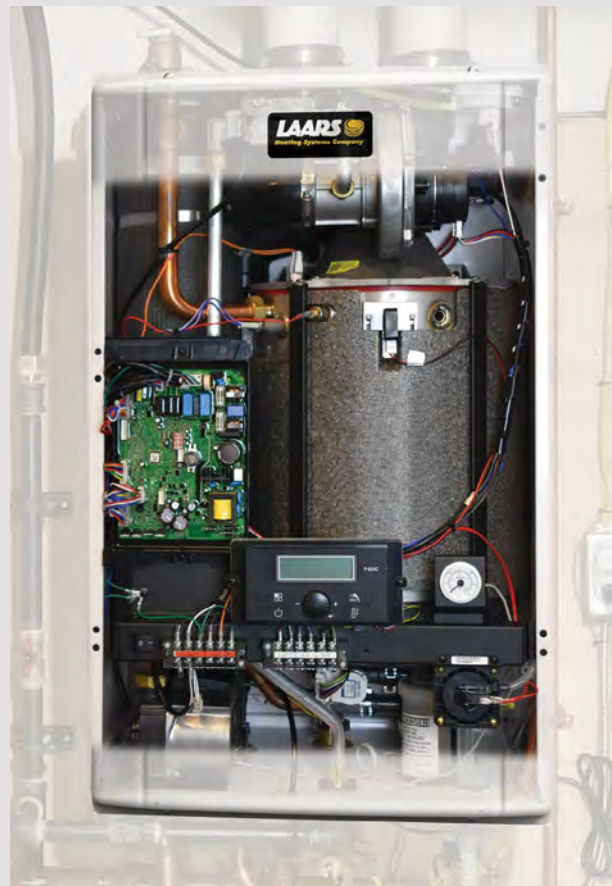

CONTRACTOR FRIENDLY

Designed for easy installation and constructed with the installer in mind!

INCLUDED WITH FT SERIES



Internal
Circulator
(Installed)



Primeless
Condensate Trap
(Installed)



Automatic Air
Elimination Vent



Wall Mounting
Kit



Propane
Conversion Kit



Outdoor Sensor
Kit

OPTIONAL INSTALLATION ACCESSORIES



Condensate
Neutralizer
A2123601



Piping Manifold –
Combi
P2134400



Piping Manifold –
Heat Only
100-140 MBH – P2135900
199 MBH – P2135800



Vent Terminal –
Flush
2" CA010100
3" CA010101




Vent Terminal –
Bazooka
2" 239-44069-02
3" 239-44069-01

LAARS® FT SERIES SPECIFICATIONS

SPECIFICATION	UNITS/CONDITION	Combi Boilers		Heating Only Boilers		
		MFTCW140	MFTCW199	MFTHW100	MFTHW140	MFTHW199
Input, Max Fire	MBH (kW)	140 (41)	199 (58)	100 (29)	140 (41)	199 (58)
AHRI Cert. Heating Capacity	MBH (kW)	129 (38)	181 (53)	93 (27)	129 (38)	181 (53)
Net AHRI Rating	MBH (kW)	112 (33)	157 (46)	81 (24)	112 (33)	157 (46)
Weight, Unit	lbs. (kg)	111 (50)	130 (59)	98 (44)	102 (46)	118 (54)
H x W x D	Inches (cm)	29 x 17 3/8 x 15 1/2 (73 x 44 x 40)	32 x 19 3/4 x 16 7/8 (81 x 50 x 41)	29 x 17 3/8 x 15 3/8 (74 x 44 x 39)		32 x 19 3/4 x 16 7/8 (81 x 50 x 41)
Turndown	–	10:1	10:1	5:1	10:1	10:1
Heating “CH” Supply	NPT	1”		1 1/4”		
Heating “CH” Return	NPT	1”		1 1/4”		
DHW Outlet	NPT	3/4”		–		
DHW Inlet	NPT	3/4”		–		
DHW Flow Rate	35°F Rise - GPM (l/m)	7.1 (27)	9.8 (37)	–		
	45°F Rise - GPM (l/m)	5.5 (21)	7.7 (29)	–		
	77°F Rise - GPM (l/m)	3.2 (12)	4.8 (18)	–		
Minimum Flow Rate	GPM (l/m)	0.5 (1.9)		–		
Gas Inlet	NPT	3/4”				
AHRI Certified Efficiency	AFUE	95%				
Condensate Line	NPT	1/2”				
Gas Supply Pressure	In WC	3.5 - 10.5 natural gas, 8-13 propane				
Pressure Relief Settings	psi (kPa)	30 (207)				
Air Intake Collar	Inches (cm)	3 (7.6)				
Exhaust Outlet Collar	Inches (cm)	3 (7.6)				
Vent Diameter & Equivalent Length	Inches/ft.	2/50				
		3/100				
Vent Material	–	PVC, CPVC, Polypropylene, SS AL29-4C				
Fuel	–	Natural Gas or Propane (propane conversion kit included)				
Power Supply	Volts/Hertz	120/60				
Warranty	–	Limited 10 year heat exchanger / 5 year parts				

Note: The Net AHRI Water Ratings shown are based on a piping and pickup allowance of 1.15.

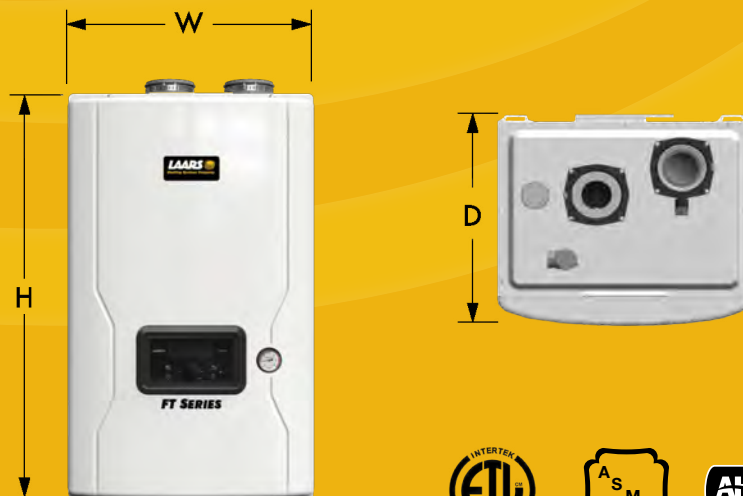

Browse Laars
Residential Products



LAARS®
Heating Systems Company

Customer Service and Product Support: 800.900.9276 • Fax 800.559.1583

Headquarters: 20 Industrial Way, Rochester, NH 03867 • 603.335.6300 • Fax 603.335.3355

9 Brigden Gate, Halton Hills, Ontario, Canada, L7G 0A3 • 905.203.0600 • Fax 905.636.0666

www.LAARS.com